


PRODUCT IMAGE



TECHNICAL DRAWING

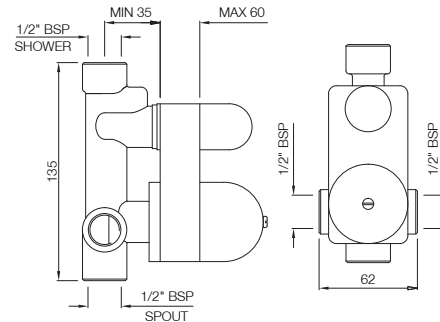

PRODUCT DETAILS

Description	In-wall Body of Single Lever Diverter with 35mm Cartridge
Product Code	ALE-CHR-055
Connection Size (mm)	N.A
Aerator Size	N.A
Flow Rate	26.07 LPM @ 3 bar
Flow Regulator	N.A
Recommended Water Pressure	0.5 Bar - 5 Bar
Material Composition Specification in Percentage	<p><b>Brass Ingots as per IS:1264-1997-</b> Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder)</p> <p><b>Brass Rod as per IS:319-1989-</b> Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder)</p> <p><b>Brass Sheets as per IS:410-1977-</b> Cu (61.5-64.5), Pb (0.0-0.3), Fe (0.0-0.075), Total Impurity (0.0-0.6), Zn (Remainder)</p>
Cartridge Specification	Cartridge with Brass Spindle and Temperature Limiter Life Cycle EN 817: 70,000 cycles (Standard), -1.40 LAC Cycles as per EN 817*, - 7.0 LAC Cycles (ON/OFF)*
Water Tightness	12 bar (Pass)
Pressure Resistance	20 bar (Pass)
Finish	<b>Plating:</b> Nickel-8.0 micron Chromium-0.20 micron, Salt Spray (300 hrs+Validated), Adhesion (Pass)
Available Colour Finishing	Chrome (CHR)

DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries.110% variation in flow rate may be possible. Jaquar reserves the right to make the necessary amendments at any time without prior notice.