


## PRODUCT IMAGE



## TECHNICAL DRAWING

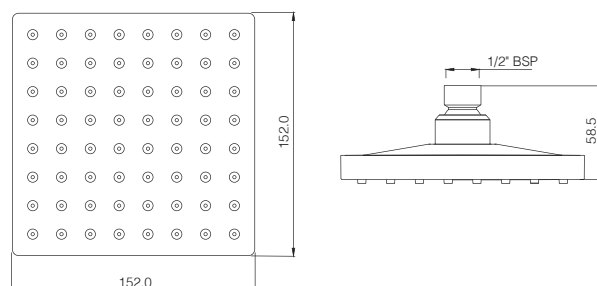

## PRODUCT DETAILS

Product Code	EOS-CHR-443
Description	Single Function 152X152mm Square Shape Overhead Shower
Flow Rate	20.58 LPM @ 3 bar
Flow regulator	By using flow regulators + Brass Housing (Product should be ordered with suffix as GA-6.0 LPM, GB-8.0 LPM, & GC-12.0 LPM @ 3.0 Bar pressure) one can regulate the flow rate.
Recommended Water Pressure	1.0 Bar - 3.0 Bar
Mount Type	Wall Mounting
Spray Modes	Single Function
Material Composition Specification in Percentage	<p><b>Brass Rod as per IS:319-1989</b> Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder)</p> <p><b>ABS Specification</b> Specific Gravity g/cm<sup>2</sup> (1.06-1.10), Melt Mass Flow Rate g/10 min. (20-26), Rockwell Hardness (95-115), DTUL @ 66 psi /0.45 MPa 0C (78-102)</p>
Technology	<b>Advanced Rubit</b> - Lime scale deposits stick to the shower face can be easily rubbed off by hand or flannel.
Finish	Salt Spray (200 hrs + Validated) Adhesion (Pass)
Available Finishing	CHROME (CHR)

DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. 10% variation in flow rate may be possible. Jaquar reserves the right to make the necessary amendments at any time without prior notice.