
esscobathware.com
Document No.
SNW/CMS/24/951NSPP



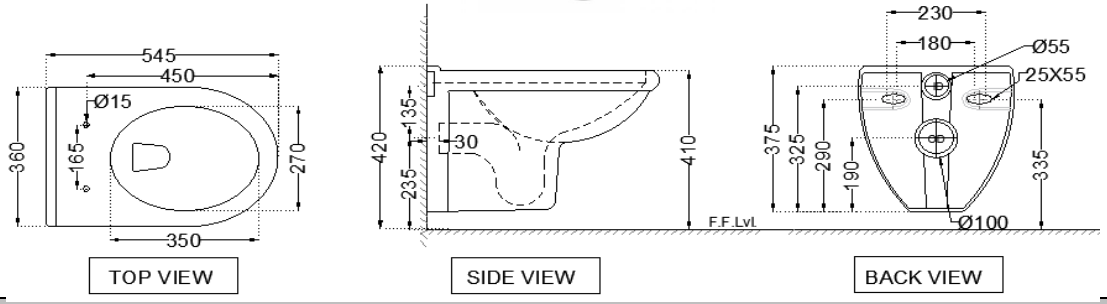

GENERAL INFORMATION	
Product Code	CMS-WHT-103951NSPP
Brand	Essco
Colour	White
Type	Wall Hung WC
Material	Ceramic-Vitreous China (VC)
PRODUCT SPECIFICATION	
Product Dimension	365x545x375 mm
Bowl Opening (Inner Dimension)	270x350 mm
Product Net Weight	16.0 Kg
Product Gross Weight	19.0 Kg
Packaging Dimension	560x400x450 mm
Outlet	Horizontal
Inlet Hole And Outlet Hole Dimension	Internal diameter of inlet hole dia. Ø 55 ± 3 mm
	External diameter of outlet hole dia. Ø 100 ± 5 mm
PRODUCT FEATURES	
Product Features	Box rim, Round Design Complete Trap Wash PP soft close seat cover Water Usage - 3/6 LPF With Dual Flushing Anti Bacterial Glaze on Ceramic Smooth Glaze Surface Material - Vitreous China (VC) Hidden Trap with Blind Installation Design Product With Complete Genuine Fixing Accessories
ACCESSORIES INCLUDED	
Seat cover	CMS-WHT-101S
Inlet Outlet Gaskit	ZPS-WHT-GK01
Fixing kit	ZPS-WHT-FB10
ACCESSORIES RECOMMENDATION	
Rag bolt	ZPS-SNS-RB01 & ZPS-MST-RB02
Concealed cistern	JCS-WHT-2400S, 2400P, 2400, 2400WS, 2400WP, 2400FS, 2400FP, 2431P, 2431FP, 2431, 2431S, 2431FS

CARE AND CLEANING GUIDELINES

- Vitreous china sanitary ware products are fragile in nature and need to be handled with care (to avoid personal injury) at all times during its storage, handling, installation and use thereafter.
- The product is heavy and it is recommended that two persons hold it while it is being fixed.
- Carefully inspect the new product for damage before installation.
- Risk of product damage. Over tightening may cause breakage or chipping of vitreous china.
- Risk of external leakage. Do not lift or rock the bowl after placement.
- Always test your cleaning solution on an inconspicuous area on the product before applying it to the entire surface.
- Do not allow cleaners to sit or soak on the product.
- Use a soft, dampened sponge or cloth to clean. Never use abrasive material like a bristle brush or scouring pad.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaners.
- Clean Chrome, stainless steel surfaces once a week. Do not use cleaners containing chloride on chrome, stainless steel. If used, rinse the surface immediately to prevent corrosion.
- Wherever chrome plating is used on the products, use only warm water to clean and then dry with a soft cloth.

QUALITY MANAGEMENT SYSTEM - ISO 9001

"DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. All dimensions are in mm (Tolerance ± 5 MM). Jaquar reserves the right to make the necessary amendments at any time without prior notice.
For Installation Refer Actual Product.Last modified on October 2026.